



YP452 Date:06/28/24



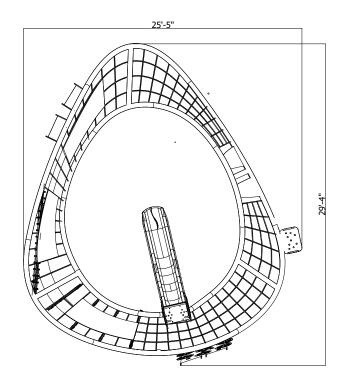

YP452 Date:06/28/24



## **Product Specification**

Product Name: Brickyard Model Number: YP452

Length: 29'-4" Size:

Width: 25'-5" Height: 10'-7"

Fall Height: 10' Foundations:

Concrete Volume: 5 cubic yards **COMPLIANT ASTM F-1487** WITH: CSA Z614

Ages: 5-12 years Length: 41'-5" Use Zone: Width: 37'-5"



Technical Details:

Frame Main Structure shall be 5-1/2" (139.8mm) diameter steel tubing, which after fabrication shall be

powder coated in accordance with the specifications herein.

Climbing Nets 20mm diameter rope consists of 6 main strands, each strand containing 24 galvanized steel

reinforcing strands within a polyamide sleeve, wrapped around a solid polyamide core for a total of 144 reinforcing strands. Ropes shall achieve a Class 7-8 colorfastness rating.

Rope Ball Connec-One-piece compressed aluminum ball connector, compressed in place with 150,000 pounds

tors

source (667kN) to prevent the connection from moving and causing premature cable wear.

Rope End Fittings One-piece compressed stainless steel end fitting.

Shall be uniform construction with rotationally molded linear low-density U.V. stabilized polyeth-Rotomolded Components

ylene with a 1/4" (6mm) nominal wall thickness, available in manufacturer's standard colors.

Flexible Surfaces 3/8" (10mm) thick textile-reinforced rubbber belt.

**Panels** Shall be made from 3/4" (18mm) thick high density, UV-stabilized and color impregnated

polyethylene.

**Fasteners** All fasteners shall be stainless steel with locking patch or locking compound.

Metal Finish Polyester (Powder) Coating - The polyester coating shall be uniformly applied by the electro-

static method to a minimum thickness of four mils. Promptly after application of the powder, the coating shall be oven-cured at 350 degrees Fahrenheit. The color(s) of the polyester

coating shall be from the manufacturer's standard color selection.

Installation recommended by a licensed playground contractor, trained and certified on the Installation

applicable playground installation methods and standards, preferably certified by manufacturer

or National Playground Contractors Association.

YP452 Date:06/28/24